




Yachting Solutions
229 Commercial Street
Rockport, ME, US
Phone: (207) 236-8100

AB Inflatables Lammina 8 UL

Boat Type: Inflatable

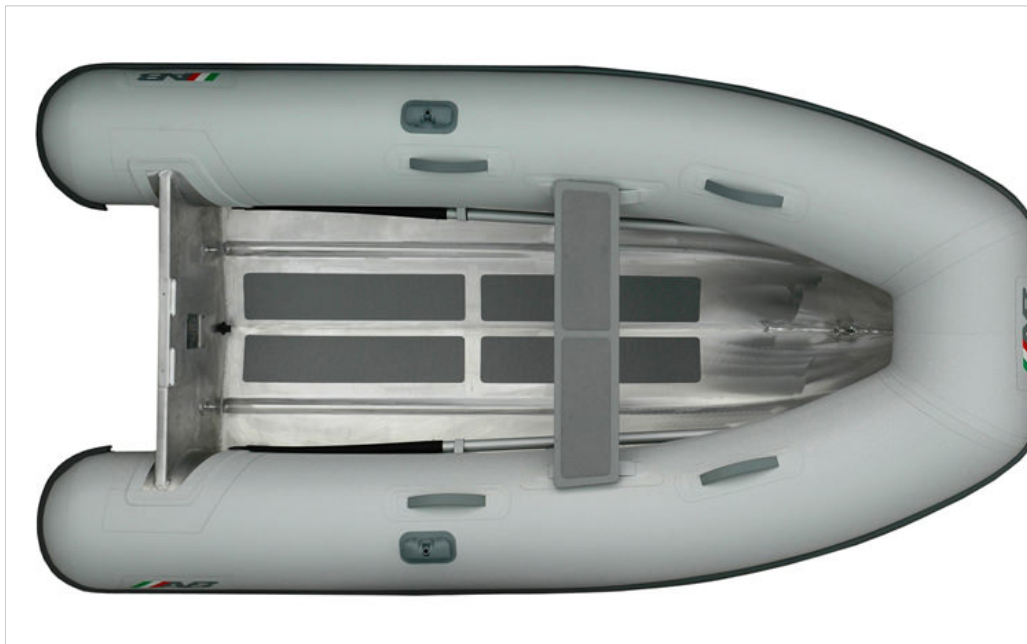

OVERVIEW

Lammina is the first line of marine-grade, aluminum-hull inflatables to reach the U.S. market. The Superlight models, available in lengths 9,5 feet and under, feature a 2,28mm (0.090") aluminum hull. The rest of the line, available in lengths 10 feet and larger, sports a 3,17mm (0.125") aluminum hull. The transom thickness on models 8 to 10 feet is 3,17mm (0.125") and from models 11 to 16 feet is 4,7mm (0.190"). These tough, lightweight and durable aluminum hulls will resist abrasions from rocky shores, coral and sandy beaches. The innovative design of the Lammina series cuts through wakes and chop with far less pounding. The result is an exceptionally dry, stable and superior ride.

- Overall Length: 8' 5" / 2.56m
- Overall Beam: 4' 11" / 1.50m
- Inside Length: 5' 10" / 1.79m
- Inside Beam: 2' 2" / 0.66m
- Tube Diameter: 16" / 0.40m
- Number of Chambers: 2
- Person Capacity: 4
- Weight: 68lb / 31kg

- Recommended HP: 4hp / 3.0kw
- Maximum HP: 5 hp / 3.8kw
- Shaft Length: 15" / 38.1cm
- RDC Design Category: C

SPECIFICATIONS

Basic Information

Manufacturer:	AB Inflatables	Boat Type:	Inflatable
Model:	Lamina 8 UL	Hull Material:	Aluminum
Year:	2017	Hull Type:	Deep Vee
Category:	Power		

Dimensions & Weight

Length:	8.00 ft	Draft - max:	-
LOA:	8 ft 5 in - 2.57 meter	Bridge Clearance:	-
Beam:	4 ft 11 in - 1.5 meter	Dry Weight:	68 ft
Deadrise Aft:	-		

Tank Capacities

Fuel Tank:	-	Holding Tank:	-
Fresh Water Tank:	-		

Accommodations

Total Cabins:	-	Crew Cabins:	-
Total Berths:	-	Crew Berths:	-
Total Sleeps:	-	Crew Sleeps:	-
Total Heads:	-	Crew Heads:	-
Captains Cabin:	No		

FEATURES

Standard Equipment

Shallow "V" Marine Grade Aluminum Hull
 Non-Skid Rubber Floor Panels
 Plastic External Transom Plate
 Aluminum Internal Transom Plate With Security Lip
 Aluminum Bow Eye
 3 Aluminum Davit Lifting Points
 Deck Drain with Plug
 Orca (CSM) Five Layer Coated Fabric
 Raised Single Rub Rail

Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
1 Front Orca (CSM) Fabric Handles on Tubes
2 Inside Bow Single Orca (CSM) Fabric Handles on Tubes
2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
Removable Rowing Seat
Oarlock Base
Telescopic Oars with Aluminum Shaft
Paddle Holders
Hand Pump
Maintenance Kit
Owner's Manual
3 Layers Reinforced Seams

Optional Equipment

Tube Chaps
Boat Cover
Chock Set

Attachment

- [Accessories and Parts](#)
- [CAD Drawing](#)
- [Chock & Davit Information](#)

GALLERY



Yachting Solutions
229 Commercial Street
Rockport, ME, US
Phone: (207) 236-8100